

CONTINUOUS FLOW HOSE REEL

# HARDWARE



## **Features**

*Grease zert fittings in both supports*

*Magna-cast aluminum support*

*Manual rewind*

*Multiple hose capabilities*

*Open side design allows faster hose drying*

*Single person operation*

*Tension knob*



## **Description**

SOLBERG® Continuous Flow Hose Reel assemblies are manufactured with magna-cast aluminum supports and brass waterway. It also features a 1.5" (38mm) non-collapsible booster hose and brass 90-degree elbow inlet swivel with male 1.5" (38mm) NST outlet. The carbon steel reel was designed to store and deploy continuous flow hose, which allows liquid to flow while the hose is still on the reel.

## **Application**

The hose reel assembly may be used for firefighting and/or wash down. Hose reels may also be installed in areas that require supplemental fire protection.

## **Specifications**

Capacity: 1.5" X 100' hose  
(38 mm X 30 m)

Pressure Rating: 200 psi (14 bar)


Reel Weight: 90 lb (41 kg)

## **Options**

- Available in stainless steel, galvanized or marine grade aluminum
- Hand crank
- Handline nozzle with multiple flows
- Vinyl cover
- High mounting stand

***SOLBERG is a member of PERIMETER SOLUTIONS, a global producer of leading fire retardant, gel and foam brands with a singular purpose: revolutionize the course of fire suppression technology with safer, more effective and more sustainable solutions. Together, we are Moving Industries Forward by Redefining Fire Suppression. [www.solbergfoam.com](http://www.solbergfoam.com)***

**Dimensional Information**

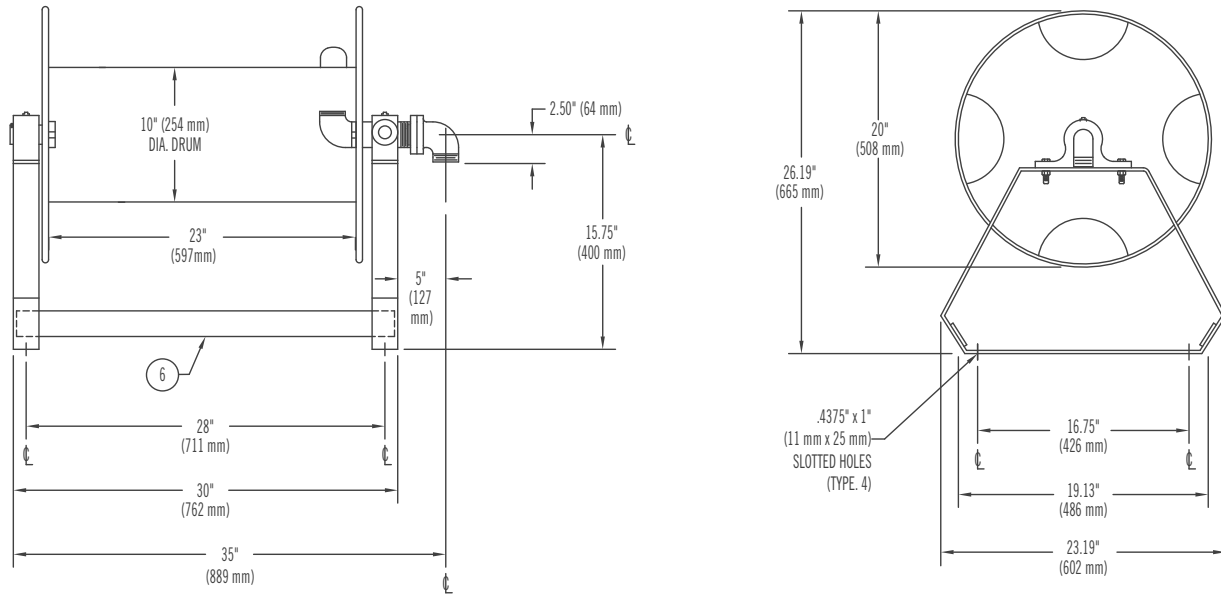

**Ordering Information**

PART NO.	DESCRIPTION	APPROXIMATE SHIPPING WEIGHT	
		lb	kg
35310	Continuous Flow Hose Reel, Model SCHR-50, 50' (15 meter) Hose	142	64
35311	Continuous Flow Hose Reel, Model SCHR-75, 75' (23 meter) Hose	165	75
35312	Continuous Flow Hose Reel, Model SCHR-100, 100' (30 meter) Hose	194	88
35313	Continuous Flow Hose Reel, Model SCHR-150, 150' (46 meter) Hose	246	111